





## CONVENTIONAL PLOUGH

- Excellent plough-tractor balance.
- Simple and strong design for all land conditions.
- Big variety of working width choice for all tractor horse powers.

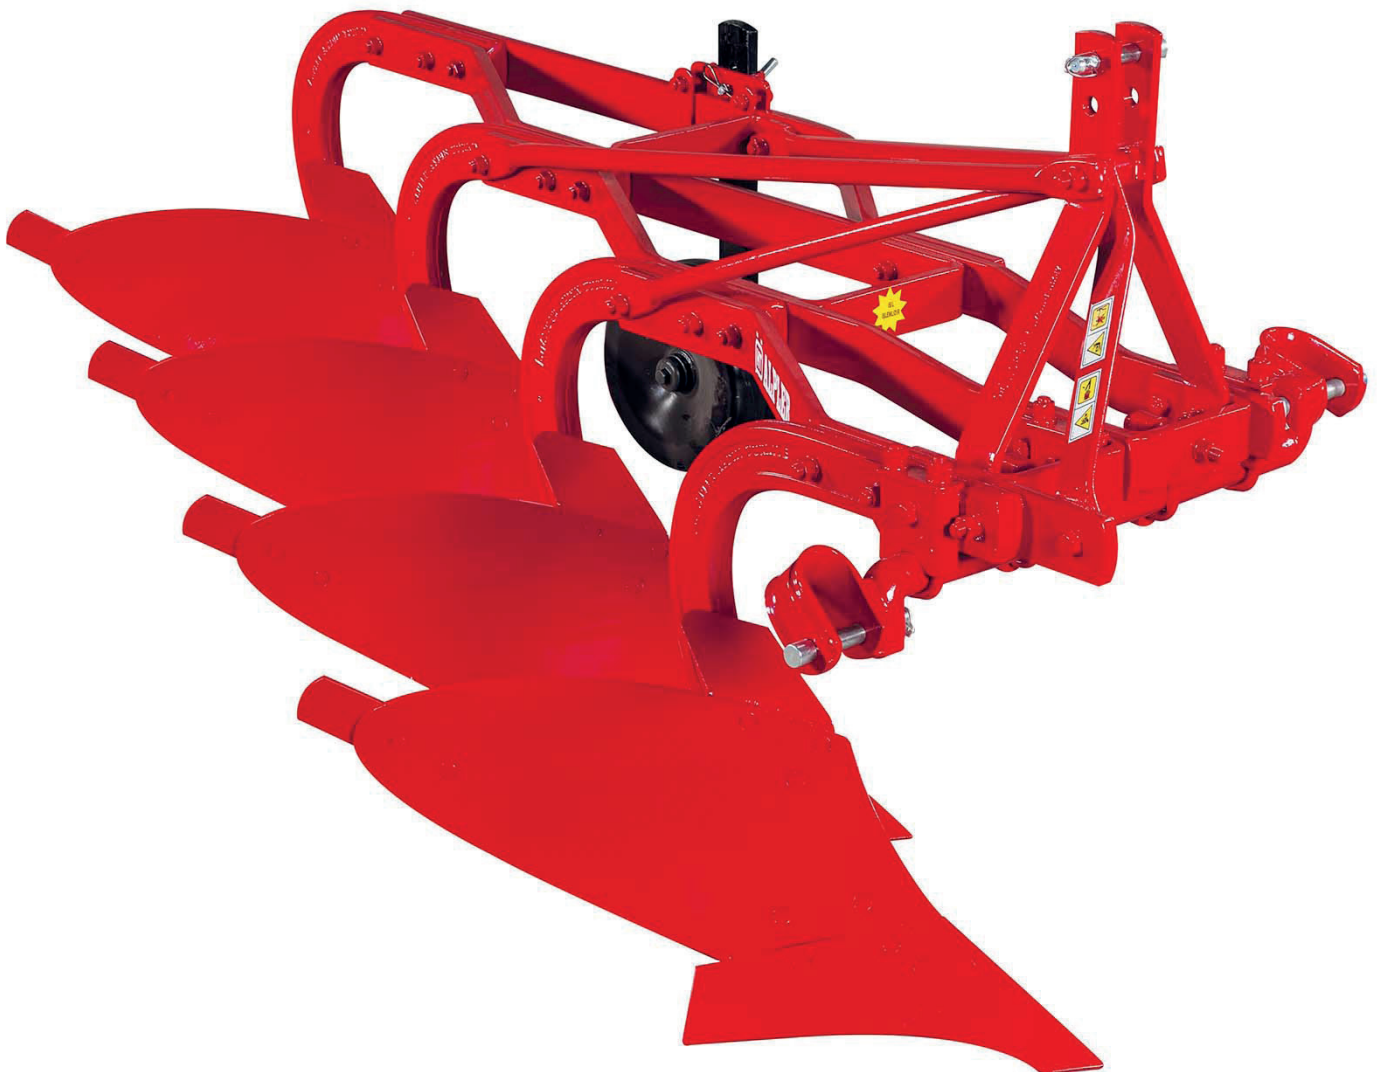







## OPTIONAL PARTS

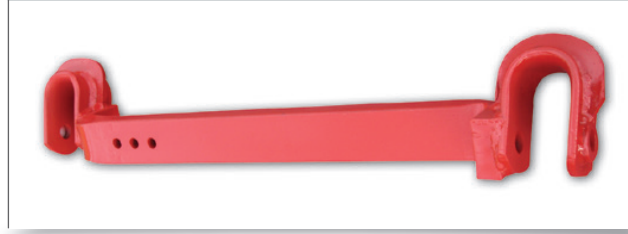- Trash boards
- Deflector
- U-Shape Lower Connection Bar
- Shares with Reversible Points
- Slatted Body
- Metal Depth Wheel
- Mouldboard Extension
- Disc Coulters
- F, X and V Type Mouldboard



U-Shape Lower Connection Bar

## TECHNICAL SPECIFICATIONS

MODEL	 Clearance (CM)	 Distance between beams (CM)	 Working width (CM)	 Working depth (CM)	 Weigh (KG)						 Power requirement (HP)					
					1	2	3	4	5	6	1	2	3	4	5	6
<b>SP07</b>	60	60	22	18	108	140	198	295	350	405	20-25	20-25	30-40	35-40	50-60	60-70
<b>SP08</b>	61	60	23,5	20	115	155	225	335	388	450	20-25	20-25	30-40	40-50	50-60	65-75
<b>SP09</b>	62	64	24,5	22	140	200	292	438	570	702	20-25	30-40	45-50	50-60	60-70	70-80
<b>SP10</b>	66	70	25,5	24	155	208	309	475	600	725	25-30	30-40	45-50	70-80	80-90	80-90
<b>SP11</b>	67	71	27,5	24	156	215	318	490	617	744	25-30	30-40	50-55	70-85	85-95	90-110
<b>SP12</b>	67	76	30	26	157	219	329	500	635	770	30-35	40-50	55-60	70-85	90-100	95-115
<b>SP13</b>	67	77	32,5	28	158	221	334	508	650	792	30-35	40-50	55-60	70-85	90-100	105-120
<b>SP14</b>	67	79	35	28	172	221	334	508	650	800	35-40	40-50	60-70	80-90	90-110	110-125
<b>SP16</b>	67	81	37,5	30	188	260	392	587	743	900	40-45	50-60	70-80	80-90	100-110	125-135
<b>SP18</b>	67	84	40	32	220	320	433	660	850	1040	45-50	60-70	80-90	90-100	100-120	135-150



ALMEKS DIŐ TİCARET LTD. ŐTİ.

Kıbrıs Őehitleri Caddesi No: 98 Kat: 6 Daire: 11, 35220 Alsancak - İzmir / TÜRKİYE

+90(232) 463 7044

+90(232) 463 9433

almeks.com.tr

info@almeks.com.tr

