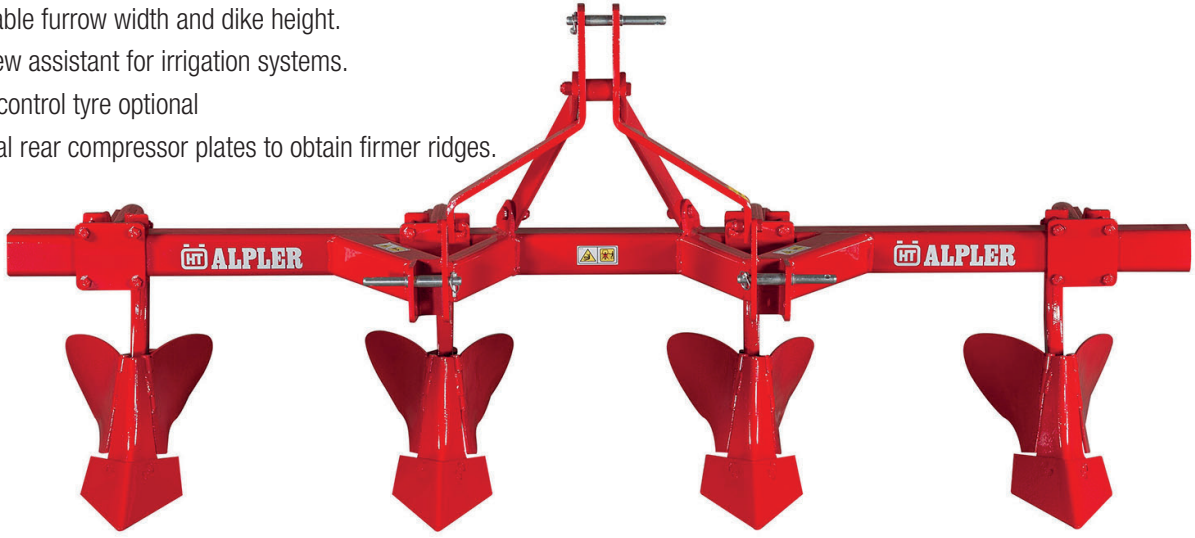










RIDGER

- Opportunity to open several furrows in one pass.
- Adjustable furrow width and dike height.
- Your new assistant for irrigation systems.
- Depth control tyre optional
- Optional rear compressor plates to obtain firmer ridges.



TECHNICAL SPECIFICATIONS

MODEL	 Number of Furrows (PIECES)	 Clearance (cm)	 Distance between beams (cm)	 Ditch Bottom Width (cm)	 Ditch Width (cm)	 Ditch Depth (cm)	 Weight (kg)	 Power requirement (hp)
RP03	3	60	60-95 (5 cm interval)	25	34-40-46	20-35	275	40-55
RP04	4	60	60-95 (5 cm interval)	25	34-40-46	30-35	370	55-65
RP05	5	60	60-95 (5 cm interval)	25	34-40-46	20-35	457	65-80
RPA03	3	65	70-90	25	34-40-46	20-35	450	50-60
RPA04	4	65	70-90	25	34-40-46	20-35	520	60-80
RPA05	5	65	70-90	25	34-40-46	20-35	620	80-90

ALMEKS

ALMEKS DIŐ TİCARET LTD. ŐTİ.

Kıbrıs Őehitleri Caddesi No: 98 Kat: 6 Daire: 11, 35220 Alsancak - İzmır / TÜRKİYE

+90(232) 463 7044

+90(232) 463 9433

almeks.com.tr

info@almeks.com.tr

/almeks

YouTube /almeks

Download on the App Store

Google play